


LED RUNNING
MAN SIGN


SINGLE/DOUBLE-SIDED

5 years


Limited Warranty




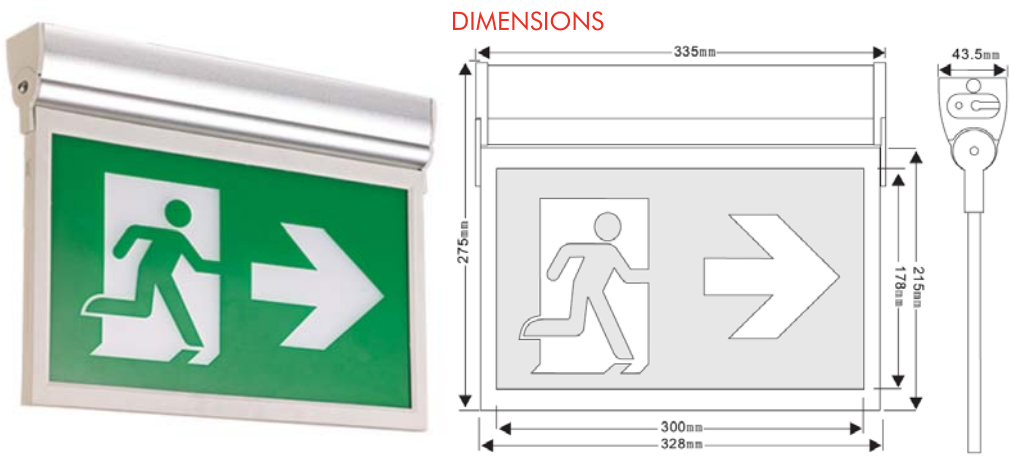
Lifetime
50 000 hours



IP40
Suitable for use in damp locations







SPECIFICATIONS


Interchangeable Stencils
Single/Double-Sided
180° Adjustable Tilt
Surface-Mount / Recessed
IP40 - Suitable for Damp Locations
Functioning Temperature:0°c to 40°c


AVAILABILITY

2W
5000K
Integrated Battery / No Battery

CHANGING THE STENCIL

Open the fixture from the bottom and simply slide in the desired stencils. The fixture supports stencils on both sides. For a single-sided application, use the white stencil to cover the undesired side.

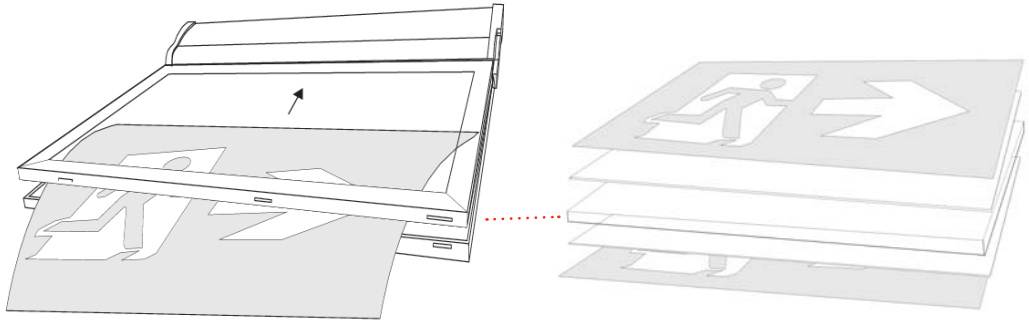

 *This icon indicates a STOCK item:
Look for this Same Day Shipping icon below in 'Ordering Information' for products that ship out on the same day (orders must be placed before 3pm EST)


INCLUDED STENCILS



2 x
Running Man with Arrow
Double-sided to point left or right



1 x
Running Man without Arrow
Double-sided to face left or right

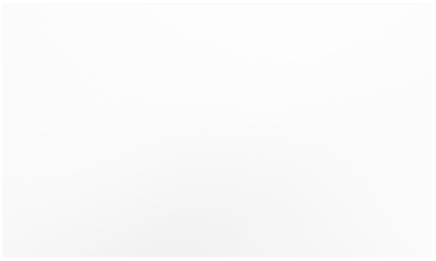

1 x
Plain White
For single-sided configurations


ORDERING INFORMATION

SERIES	POWER (WATTS)	COLOR TEMP	INTEGRATED BATTERY?	BATTERY LIFE	INPUT VOLTAGE	MODEL NUMBER
RUNNING MAN SIGN	2	5000K	YES	2+ HOURS	120-277VAC / 347V	EX-RM1-2W-BA-V1
			NO	N/A	6-24VDC / 120-277VAC / 347V	EX-RM1-2W-DC-V1


CIRCUITRY

EX-RM1-2W-BA-V1 Integrated Emergency Battery Output Wattage: 1W Ni-cad Battery: 3.6V 1000mAh jj		
AC120V 50/60Hz	Input Wattage:	3W
	Input Current:	0.24A
	Efficiency:	0.98P
AC277V 50/60Hz	Input Wattage:	3.5W
	Input Current:	0.014A
	Efficiency:	0.93P
AC347V 50/60Hz	Input Wattage:	4W
	Input Current:	0.017A
	Efficiency:	0.92P
EX-RM1-2W-DC-V1 No Battery		
DC6V - 24V	Input Wattage:	1.2W

EX-RM1-2W-BA-V1

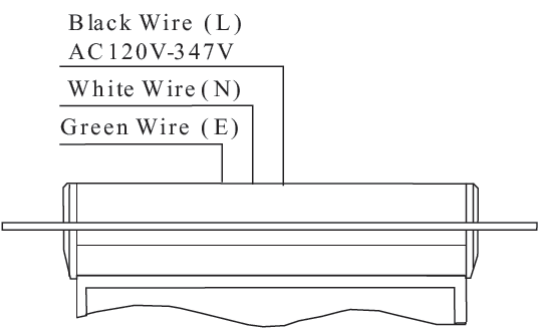

EX-RM1-2W-DC-V1

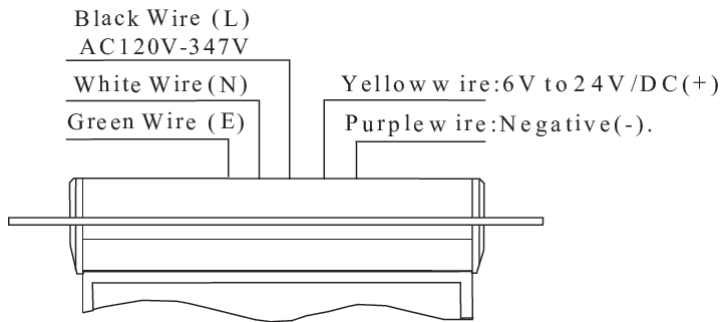


LED RUNNING
MAN SIGN


SINGLE/DOUBLE-SIDED

5 years


Limited Warranty




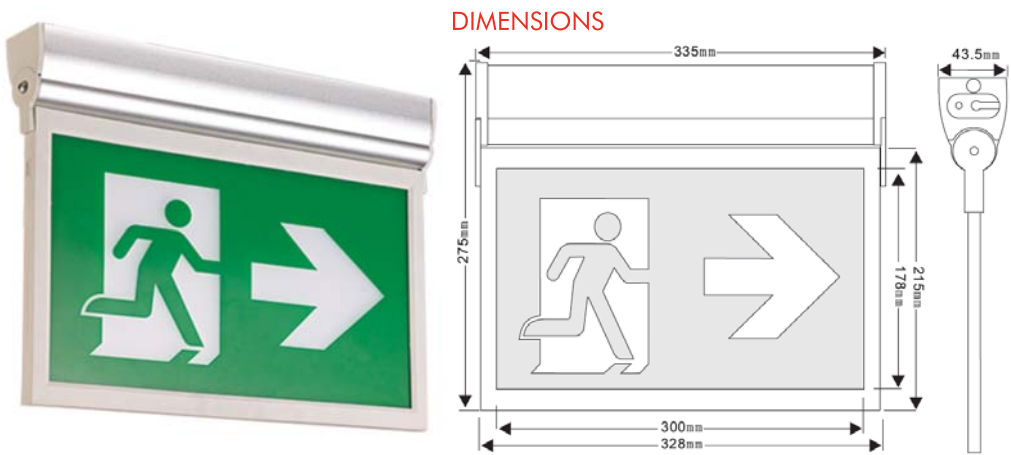
Lifetime 50 000 hours



IP40 Suitable for use in damp locations








SPECIFICATIONS

Interchangeable Stencils
Single/Double-Sided
180° Adjustable Tilt
Surface-Mount / Recessed
IP40 - Suitable for Damp Locations
Functioning Temperature:0°c to 40°c


AVAILABILITY

2W
5000K
Integrated Battery / No Battery

 *This icon indicates a STOCK item:
Look for this Same Day Shipping icon below in 'Ordering Information' for products that ship out on the same day (orders must be placed before 3pm EST)

CHANGING THE STENCIL

Open the fixture from the bottom and simply slide in the desired stencils. The fixture supports stencils on both sides. For a single-sided application, use the white stencil to cover the undesired side.

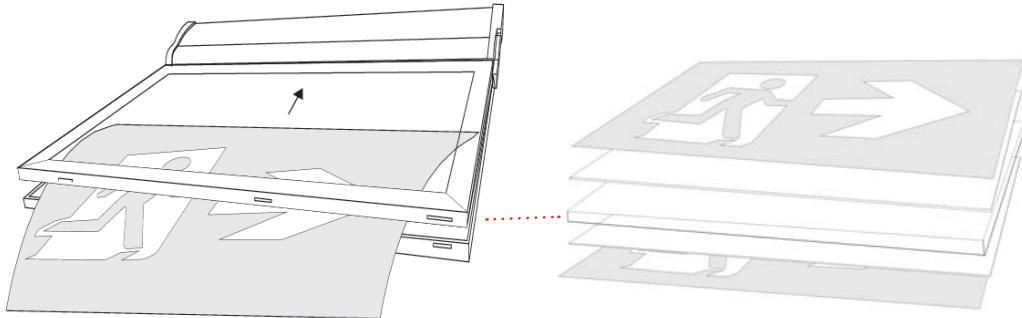


INCLUDED STENCILS



2 x
Running Man with Arrow
Double-sided to point left or right



1 x
Running Man without Arrow
Double-sided to face left or right

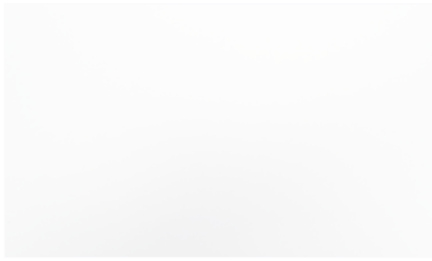

1 x
Plain White
For single-sided configurations


ORDERING INFORMATION

SERIES	POWER (WATTS)	COLOR TEMP	INTEGRATED BATTERY?	BATTERY LIFE	INPUT VOLTAGE	MODEL NUMBER
RUNNING MAN SIGN	2	5000K	YES	2+ HOURS	120-277VAC / 347V	EX-RM1-2W-BA-V1
			NO	N/A	6-24VDC / 120-277VAC / 347V	EX-RM1-2W-DC-V1

CIRCUITRY

EX-RM1-2W-BA-V1 Integrated Emergency Battery Output Wattage: 1W Ni-cad Battery: 3.6V 1000mAh jj		
AC120V 50/60Hz	Input Wattage:	3W
	Input Current:	0.24A
	Efficiency:	0.98P
AC277V 50/60Hz	Input Wattage:	3.5W
	Input Current:	0.014A
	Efficiency:	0.93P
AC347V 50/60Hz	Input Wattage:	4W
	Input Current:	0.017A
	Efficiency:	0.92P
EX-RM1-2W-DC-V1 No Battery		
DC6V - 24V	Input Wattage:	1.2W

EX-RM1-2W-BA-V1

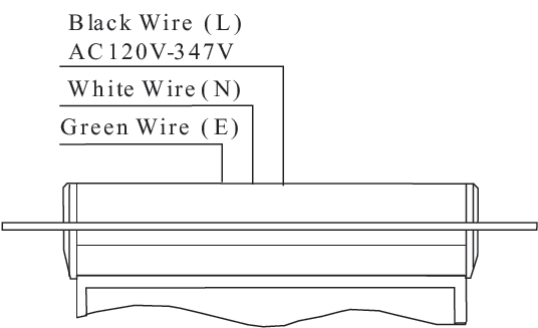

EX-RM1-2W-DC-V1

