



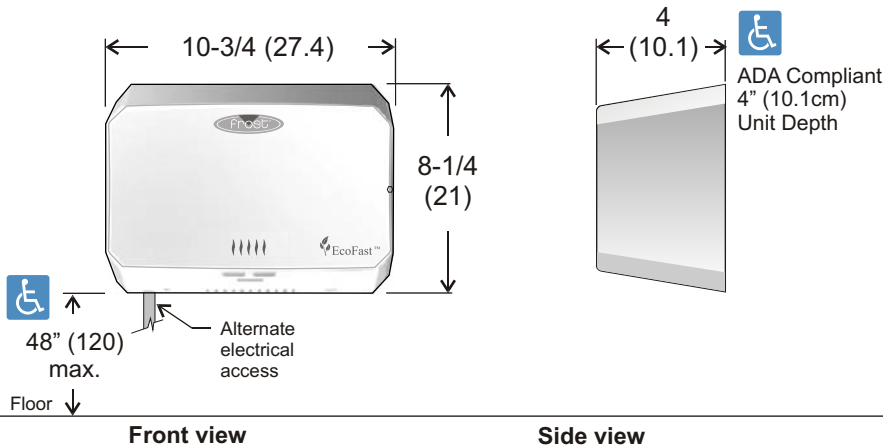

## Compact, High Speed Hand Dryer, Hands Free

**Code 1194:** Compact, slim, high speed, hands free hand dryer, chrome finish.

Overall dimensions in inches (centimeters in brackets).

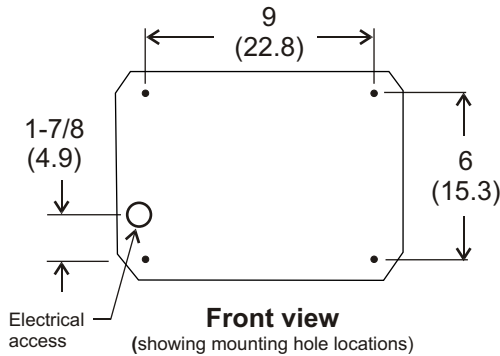

## Specifications

- Site location:** • These compact hand dryers are ideal for renovations and areas with 15 amp. circuits available.
- Materials:** • Outer casing is 18 ga. drawn Stainless steel in chrome finish.
- Power Usage:** • Whole unit is rated at 1000 watts. Heating element: 500 watts. Operating Voltage: 110-120 Vac, 50/60Hz, Amps: 1.0kw. Standby Power: Less than 0.5W.
- Electrical Safety:**
  - Brush motor: .67 HP, 16k - 29k R.P.M, dual ball bearings.
  - Motor thermal protection: Auto resetting thermostat turns unit off at 135 deg. C (275 deg. F).
  - Heater Thermal Protection: Auto Resetting Thermostat turns unit off at 85 deg. C (185 deg. F). Resets at 75 deg. C (167 deg. F). Timing protection: 60 seconds auto shut off.
- Performance:**
  - Drying time: 10 - 15 seconds. Sensor range: 6" (15cm).
  - Air speed output: 45.5 - 70 m/s (164 - 252 km/hr), 150 - 230 ft/s (102 -157 mph).
  - Volume: 71-102 m<sup>3</sup>/h, (42-60 CFM).
  - Sound Level: 68.9 dB-A @ 2m. Air output temperature: 55 degrees C (131 deg. F).
- Warranty:** • Complete 5 years from date of purchase.
- Maintenance:** • Motor and all working parts must be kept clean from excessive dirt/dust and any form of foreign debris. Failure to maintain unit may reduce performance and result in void of warranty.
- LEED: Credit:**
  - Minimum Energy Performance: Design and Construction, EA Prerequisite 2
  - Optimize Energy Performance: Design and Construction, EA Credit 1
- Shipping Weight:** • 4.2 kgs (9.2lbs)
- Installation:** • Supplied with mounting template, instructions, screws and anchors.







### Compact, High Speed Hand Dryer, Hands Free

**Code 1195:** Compact, slim, high speed, hands free hand dryer, white finish.

Overall dimensions in inches (centimeters in brackets).

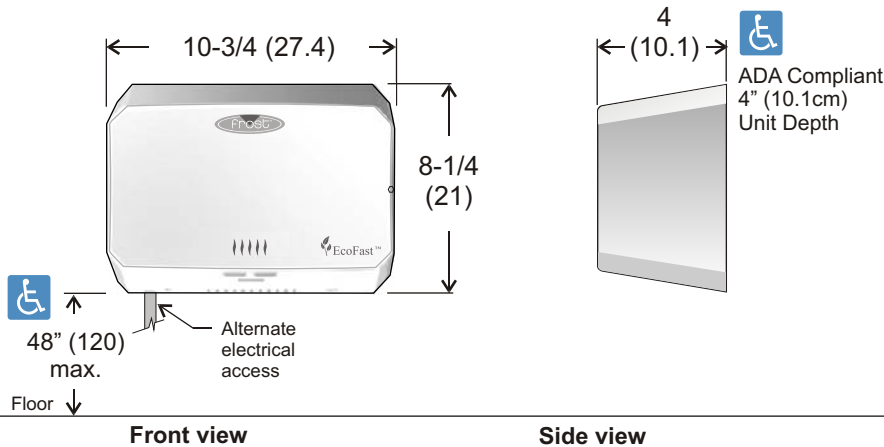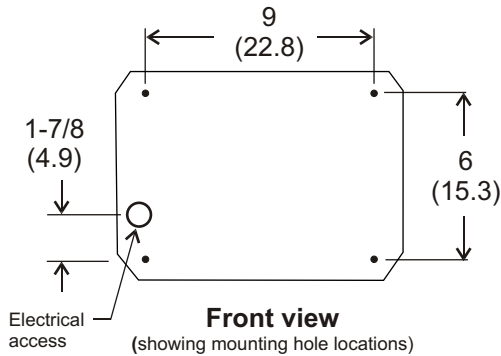

### Specifications

- Site location:** • These compact hand dryers are ideal for renovations and areas with 15 amp. circuits available.
- Materials:** • Outer casing is 18 ga. drawn in white powder coat finish.
- Power Usage:** • Whole unit is rated at 1000 watts. Heating element: 500 watts. Operating Voltage: 110-120 Vac, 50/60Hz, Amps: 1.0kw. Standby Power: Less than 0.5W.
- Electrical Safety:** • Brush motor: .67 HP, 16k - 29k R.P.M, dual ball bearings.  
• Motor thermal protection: Auto resetting thermostat turns unit off at 135 deg. C (275 deg. F).  
• Heater Thermal Protection: Auto Resetting Thermostat turns unit off at 85 deg. C (185 deg. F). Resets at 75 deg. C (167 deg. F). Timing protection: 60 seconds auto shut off.
- Performance:** • Drying time: 10 - 15 seconds. Sensor range: 6" (15cm).  
• Air speed output: 45.5 - 70 m/s (164 - 252 km/hr), 150 - 230 ft/s (102 -157 mph).  
• Volume: 71-102 m<sup>3</sup>/h, (42-60 CFM).  
• Sound Level: 68.9 dB-A @ 2m. Air output temperature: 55 degrees C (131 deg. F).
- Warranty:** • Complete 5 years from date of purchase.
- Maintenance:** • Motor and all working parts must be kept clean from excessive dirt/dust and any form of foreign debris. Failure to maintain unit may reduce performance and result in void of warranty.
- LEED: Credit:** • Minimum Energy Performance: Design and Construction, EA Prerequisite 2  
• Optimize Energy Performance: Design and Construction, EA Credit 1
- Shipping Weight:** • 4.2 kgs (9.2lbs)
- Installation:** • Supplied with mounting template, instructions, screws and anchors.







## Compact, High Speed Hand Dryer, Hands Free

**Code 1196:** Compact, slim, high speed, hands free hand dryer, brushed stainless steel.

Overall dimensions in inches (centimeters in brackets).

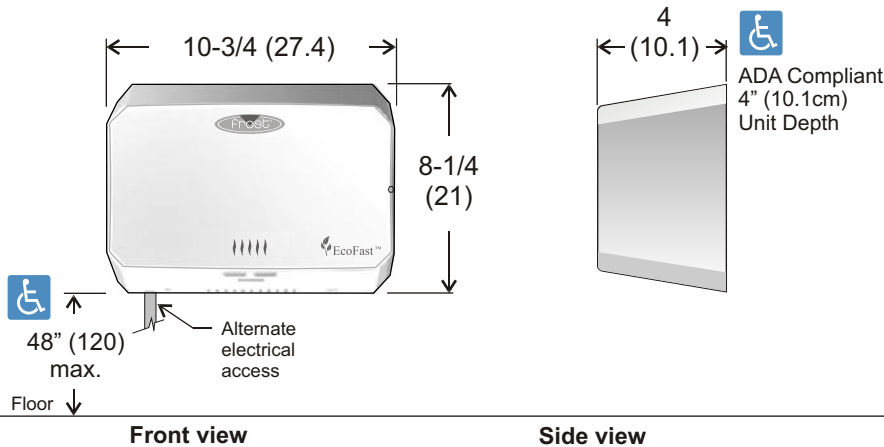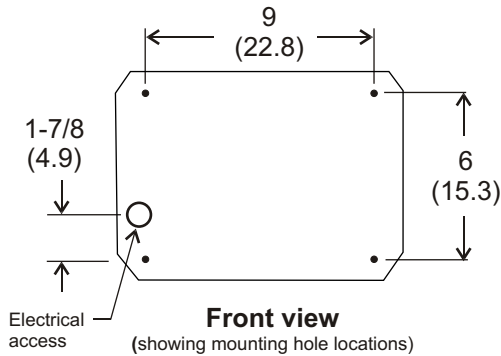

## Specifications

- Site location:** • These compact hand dryers are ideal for renovations and areas with 15 amp. circuits available.
- Materials:** • Outer casing is 18 ga. drawn stainless steel in brushed finish.
- Power Usage:** • Whole unit is rated at 1000 watts. Heating element: 500 watts. Operating Voltage: 110-120 Vac, 50/60Hz, Amps: 1.0kw. Standby Power: Less than 0.5W.
- Electrical Safety:**
  - Brush motor: .67 HP, 16k - 29k R.P.M, dual ball bearings.
  - Motor thermal protection: Auto resetting thermostat turns unit off at 135 deg. C (275 deg. F).
  - Heater Thermal Protection: Auto Resetting Thermostat turns unit off at 85 deg. C (185 deg. F). Resets at 75 deg. C (167 deg. F). Timing protection: 60 seconds auto shut off.
- Performance:**
  - Drying time: 10 - 15 seconds. Sensor range: 6" (15cm).
  - Air speed output: 45.5 - 70 m/s (164 - 252 km/hr), 150 - 230 ft/s (102 -157 mph).
  - Volume: 71-102 m<sup>3</sup>/h, (42-60 CFM).
  - Sound Level: 68.9 dB-A @ 2m. Air output temperature: 55 degrees C (131 deg. F).
- Warranty:** • Complete 5 years from date of purchase.
- Maintenance:** • Motor and all working parts must be kept clean from excessive dirt/dust and any form of foreign debris. Failure to maintain unit may reduce performance and result in void of warranty.
- LEED: Credit:**
  - Minimum Energy Performance: Design and Construction, EA Prerequisite 2
  - Optimize Energy Performance: Design and Construction, EA Credit 1
- Shipping Weight:** • 4.2 kgs (9.2lbs)
- Installation:** • Supplied with mounting template, instructions, screws and anchors.

