




Built-in connectors



Optional bevelled  
male/female ramps

- For industrial applications in oily areas e.g.: irregular and large work cells...
- Provides good support against muscular fatigue and better slip resistance and insulation than that of a cement floor
- Built-in connectors along two sides allow tiles to lock together for custom installations
- Heavy-duty 100% nitrile rubber tile is resistant to a wide range of oils and fluids
- Ramps available for increased safety

Optional high-traction Grit-Safe™ coating provides extreme slip resistance in highly oily areas

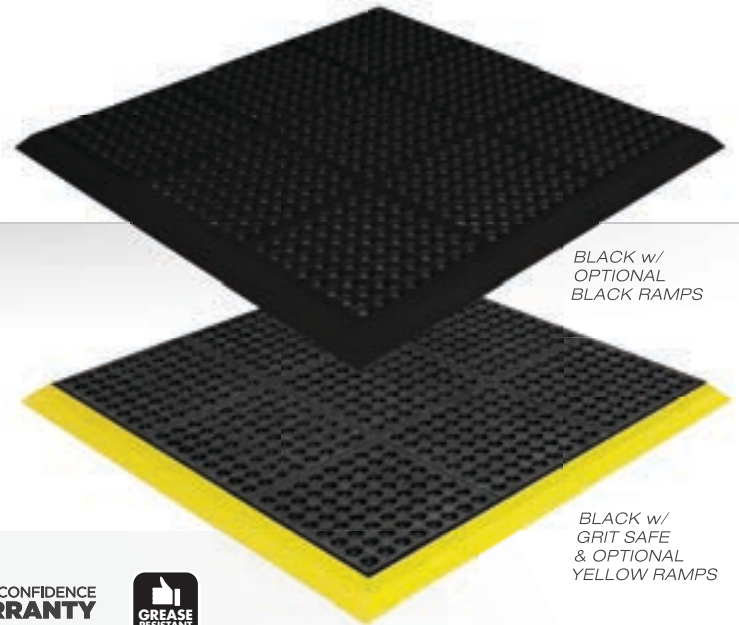

BLACK w/  
OPTIONAL  
BLACK RAMPS

BLACK w/  
GRIT SAFE  
& OPTIONAL  
YELLOW RAMPS



Anti-fatigue



Durability



Traction

In comparison to all our mats.



**TILES:** 3'x3', 3"x3'3" male/female ramps




**SPECS:** #752 5/8" thick, nitrile rubber compound, total weight 1.89 lb/ft<sup>2</sup>  
#753 5/8" thick, nitrile rubber compound with impregnated grit, total weight 2.22 lb/ft<sup>2</sup>



**WARRANTY:** Total Confidence




**FOR MORE INFO:** [mattech.ca/durastep](http://mattech.ca/durastep)

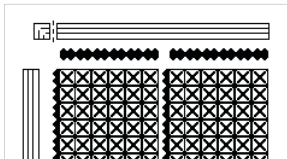

Assembly plan

- For industrial applications in oily areas e.g.: irregular and large work cells...
- Provides good support against muscular fatigue and better slip resistance and insulation than that of a cement floor
- Aggressively patterned top surface ensures maximum traction on slippery environments
- Heavy-duty 100% nitrile rubber tile is resistant to a wide range of oils and fluids
- Ramps and connectors available for increased safety

Optional high-traction Grit-Safe coating provides extreme slip resistance in highly oily areas

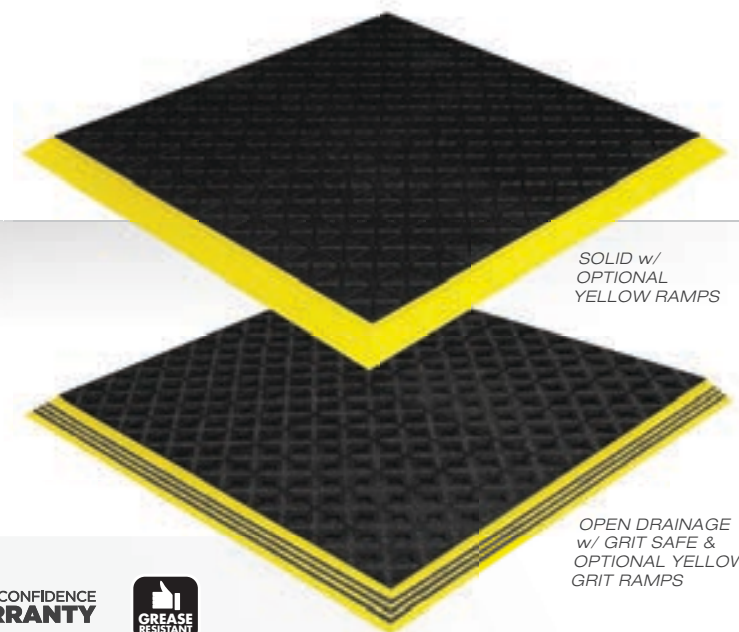

SOLID w/  
OPTIONAL  
YELLOW RAMPS

OPEN DRAINAGE  
w/ GRIT SAFE &  
OPTIONAL YELLOW  
GRIT RAMPS



Anti-fatigue



Durability



Traction

In comparison to all our mats.



**TILES:** 1'6"x1'6" (8 per case), 3"x3'3" ramp, 1'6" connector.  
Pre-constructed mats: 3'3"x 5', 3'3"x6'6", 2'6"x 9'6"



**SPECS:** #775-776 3/4" thick, nitrile rubber compound, total weight 2.22 lb/ft<sup>2</sup>  
#779 3/4" thick, nitrile rubber compound with impregnated grit, total weight 2.22 lb/ft<sup>2</sup>



**WARRANTY:** Total Confidence



**FOR MORE INFO:** [mattech.ca/egoxtreme](http://mattech.ca/egoxtreme)