




- Quality
- Value
- Service

**Tech  
Reference**

## Combination Dispenser/Disposal Fixtures

- Code 400A:** Stainless type 304 fully recessed  
**Code 400B:** Stainless type 304 semi recessed  
**Code 400C:** Stainless type 304 surface mounted  
**Code 400-14A:** Stainless type 304 fully recessed 4-1/2" deep  
 (dispenses multifold towels)  
**Code 400-14C:** Stainless type 304 surface mounted 4-1/2" deep  
 (dispenses multifold towels)  
**Code 400PL:** Solid core plastic laminate fully recessed

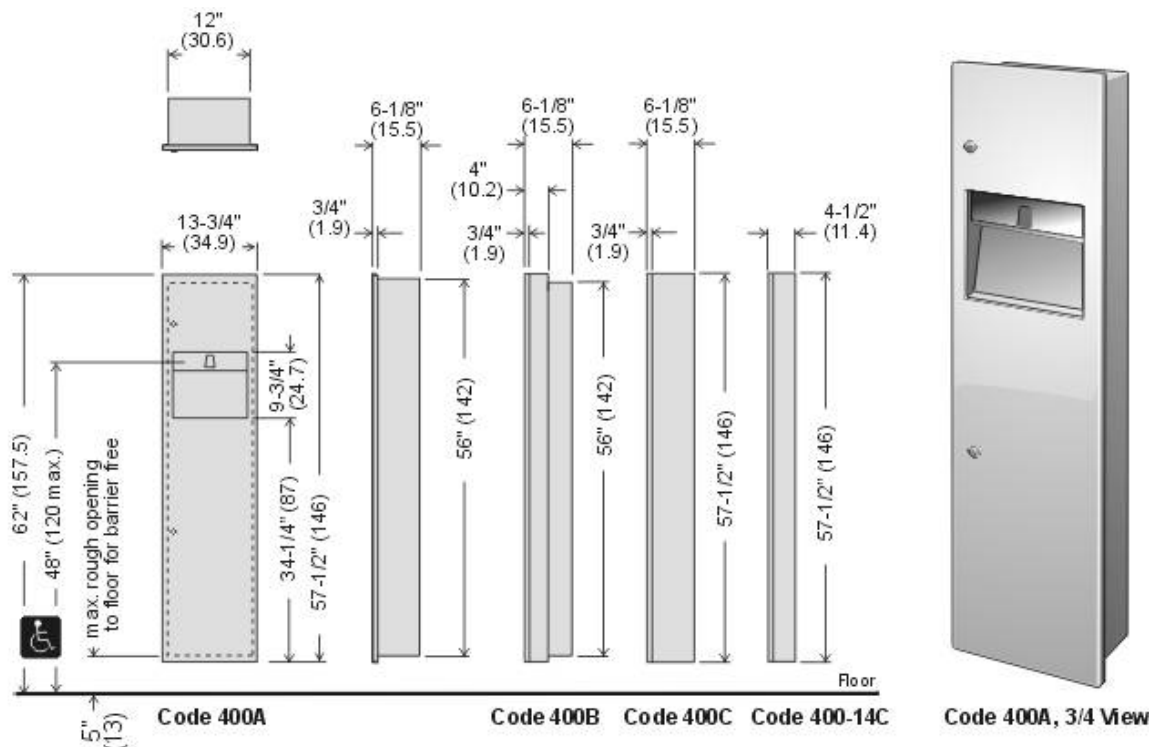

### Specifications:

**Site Location:** Our largest combination fixture is ideal for high traffic areas.

**Dispensing:** Universal towel dispenser will accept all standard single fold and roll towels.

**Features:** Stainless steel (safety guarded) saw tooth cutting bar. Heavy duty 18 gauge stainless steel door (304, # 4 brushed finish). Secured with two tumbler keyed locks. All doors are hinged with full length stainless steel piano hinges. Corrosion resistant galvanized steel (20 ga.).

Counterbalanced stainless steel door (20 ga.) provides maximum fire protection, mounted with full length piano hinge. Removable leak proof roto moulded liner with 32 litre capacity (7 gal. imp., 8.5 gal. US).

**Installation:**

**Code 400A:** Provide 56-3/8" (148.3) high x 12-3/8" (31.5) wide x 6" (15.2) deep wall opening.

**Code 400B:** Provide 56-3/8" (148.3) high x 12-3/8" (31.5) wide x 3" (7.6) deep wall opening.

Collar is secured between recessed body flange and wall. Drill mounting holes as required. For unrestricted access, height of top of unit to floor must not exceed 62" (157.5), or bottom of rough opening must not exceed 5" (13 cm) in height from floor.

---

Description and specifications applicable on date issued. Frost reserves the right to make improvements or changes without notice.