



technical concepts
Innovative Hygiene Solutions

AutoFlush® Tank

Touch-Free Tank Toilet Flushing System



- Keeps Toilets Flushed and Presentable
- Unique Wireless Sensor Enables Easy Installation
- Ultra-Compact
- World-Class Reliability

AutoFlush® Tank - Touch-Free Tank Toilet Flushing System

The AutoFlush® Tank ensures that toilets are always flushed and presentable. This wireless system promotes good hygiene by eliminating potential points of cross-contamination while preventing odors due to unflushed fixtures.

Keeps Toilet Flushed and Presentable

Ensures that tank toilets are always flushed and presentable. No trailing costs for replacement parts, simply change batteries every 100,000 cycles or 3 years.

World-Class Reliability

Smart Object Infrared Technology manages flushing automation like no other system. The wireless sensor located directly behind the washroom patron guarantees activation even if the toilet seat is raised. This dependable technology ensures good hygiene for patrons and occupants of your facilities.


Ultra Compact and ADA Compliant

The compact motor fits most tank styles and displaces little water. No need to replace your current investment of tank type toilets or move plumbing hardware to accommodate ADA compliance.

Easy Wireless Installation

Installing the AutoFlush® Tank is an easy and cost effective way to gain the benefits of an automated flushing system. Simply mount the motor in the tank, install sensor and insert batteries.

Easy 1,2,3 Step Installation

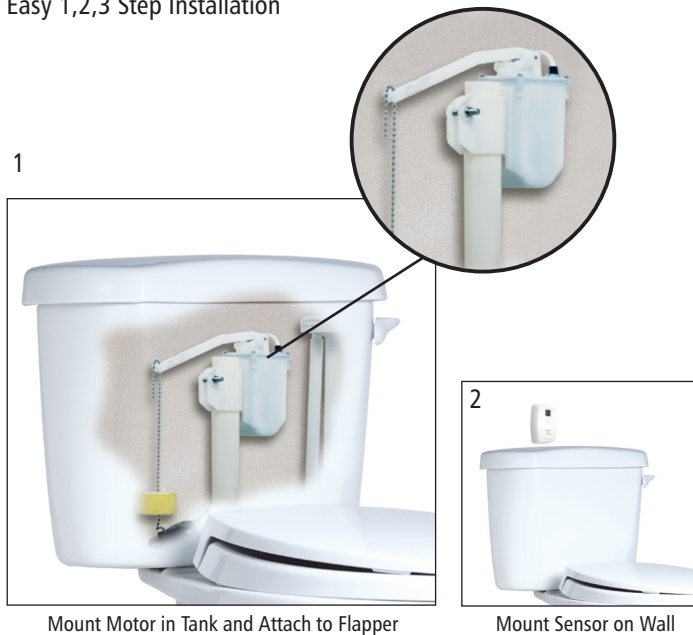

AutoFlush® Tank Features:

- IR Receiver
- Green Object Detection Indicator
- Wave Range Adjustment Dial
- Mode Toggle
- Object Detection Range Adjustment Dial
- Reset
- 24 Hr. Flush (on)
- Yellow Battery Power Indicator
- IR Emitter



The AutoFlush® Tank comes with three modes of operation:

- A) Object Detection** - toilet will flush 5 seconds after patron has left the sensing zone (32" factory setting). For immediate flush, the patron can wave their hand in front of the sensor. **This is the factory setting.**
- B) Object Detection with Extended Delay** - toilet will flush 7 seconds after patron has left the sensing zone (32" factory setting). For an immediate flush the patron can wave their hand in front of sensor.
- C) Wave Only** - toilet will flush only when the patron has waved their hand in front of the sensor.

AutoFlush® Tank Contains:



No.	Description	Case Weight	Case Pack	Case Cube
750831	AutoFlush for Tank Toilets Wireless (white)	20 lbs	6	1.2



ADA COMPLIANT

Newell Rubbermaid
Brands That Matter

© 2009 by Technical Concepts
3124 Valley Avenue, Winchester, VA 22601
09/09 MP 2.5M TC855 cata6295 Rev 4.0

Printed on Recycled Paper



technical concepts
Innovative Hygiene Solutions

www.technicalconcepts.com

North & South America : 1-800-551-5155
Europe & Middle East : +44 (0) 870 5686 824
Asia & Pacific: + (60) 4 508 5008
Africa: +27 (0) 11 455 5795

