



COMPASS™ CX SERIES

Compact Scales



Designed with Energy Efficient Weighing in Mind for Workplace & In-the-Field Weighing

Designed with energy efficiency in mind, the Compass CX series offers a battery life of up to 1,000 continuous hours, allowing for uninterrupted operation. Featuring a slim, stackable and light-weight design, the CX fits ideally in lab, industrial, education, and even household settings. The streamlined two-button operation means that the balance can be operated easily, and large backlit LCD display enables easy viewing of weighing results.

Standard Features:

- **Low Power Consumption Design Allows for Uninterrupted Operation**
Designed with energy efficiency in mind, the Compass CX series features alkaline batteries capable of up to 1,000 hours of continuous use, providing peace of mind for daily weighing applications.
- **Improved Functionality with Large Backlit LCD and Two-Button Operation**
Combined with a simplified two-button operation, the Compass CX's large backlit display increases readability in dim lighting conditions, and makes it easier to view results from a distance.
- **Practical Space-Saving Design for Convenient Storage**
The Compass CX comes in an ingenious space-saving design, which allows you to stack up to 4 scales to save storage space. Additionally, the CX features a standard stainless steel pan for durable use.

COMPASS™ CX SERIES *Compact Scales*

| Model | CX221 | CX621 | CX1201 | CX2200 | CX5200 |
|---|--|-------|--------|--------|--------|
| Capacity (g) | 220 | 620 | 1200 | 2200 | 5200 |
| Readability (g) | 0.1 | | | 1 | |
| Span Calibration Mass (Not Included) | 200 g | 500 g | 1 kg | | 2 kg |
| Stabilization Time (s) | 1.5 | | 2 | 1.5 | |
| Construction | ABS housing and stainless steel pan | | | | |
| Calibration | User-selectable external span / Digital with external weight | | | | |
| Tare Range | Full capacity by subtraction | | | | |
| Weighing Units* | g, N, oz, lb:oz | | | | |
| Application Modes | Weighing | | | | |
| Power Requirement | 3 AA batteries (included) or AC adapter (not included) | | | | |
| Typical Battery Life | 1,000 hours | | | | |
| Display Type | Liquid crystal display (LCD) with backlight | | | | |
| Display Size | 0.71 in. digits / 18 mm | | | | |
| Pan Size (W × D) | 5 in × 5.6 / 128 × 142 mm | | | | |
| Balance Dimensions (W × D × H) | 5.3 × 7.9 × 1.6 in. / 135 × 201 × 41 mm | | | | |
| Shipping Dimensions (W × D × H) | 6.7 × 9.3 × 2.2 in. / 170 × 235 × 55 mm | | | | |
| Net Weight | 1.1 lb / 0.51 kg | | | | |
| Shipping Weight | 1.5 lb / 0.7 kg | | | | |

*Availability is dependent on model.

Other Standard Features and Equipment

ABS housing, slip-resistant feet, stability indicator, mechanical and software overload/underload protection, low battery indicator, auto shut-off


Compliance

- **Product Safety:** IEC/EN 61010-1; CAN/CSA C22.2 No. 61010-1; UL Std. No. 61010-1
- **Electromagnetic Compatibility:** IEC/EN 61326-1 Class B, Basic environments; FCC Part 15 Class B; Canada ICES-003 Class B
- **Compliance Marks:** CE; RCM

Accessories

| | |
|-------------------------------|----------|
| Carrying Case | 30467763 |
| Bowl, 1050 mL | 80850075 |
| Adapter, 5V 1A, US plug | 30330714 |
| Adapter, 5V 1A, AU plug | 30333865 |
| Adapter, 5V 1A, EU plug | 30333866 |
| Adapter, 5V 1A, UK plug | 30333867 |
| Carat Bowl XS | 12102565 |
| Carat Bowl | 30020842 |

Dimensions

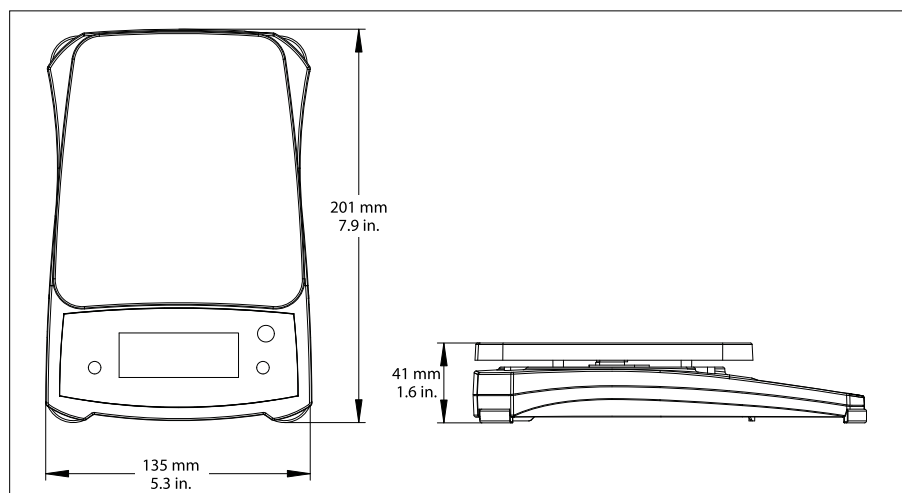

OHAUS CORPORATION

7 Campus Drive
Suite 310
Parsippany, NJ 07054 USA

Tel: 800.672.7722
973.377.9000
Fax: 973.944.7177

www.ohaus.com

The management system
governing the manufacture
of this product is
ISO 9001:2015 certified.

