




- Quality
- Value
- Service

**Tech
Reference**

Hygienic Solutions at Work

Combination Dispenser/Disposal Fixtures

- Code 415A:** Stainless type 304 fully recessed
- Code 415B:** Stainless type 304 semi recessed
- Code 415C:** Stainless type 304 surface mounted
- Code 415-14A:** Stainless type 304 fully recessed 4-1/2" deep (dispenses multifold towels)
- Code 415-14C:** Stainless type 304 surface mounted 4-1/2" deep (dispenses multifold towels)
- Code 415PL:** Solid core plastic laminate fully recessed

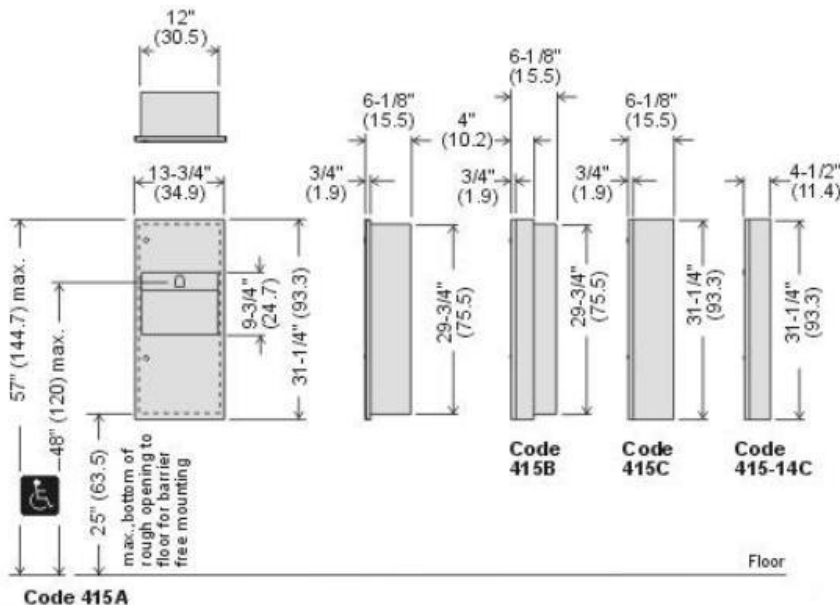

Code 415A Specifications:

Site Location: Compact combination fixture is ideal for low traffic areas.

Dispensing: Universal towel dispenser will accept all standard single fold and roll towels.

Features: Stainless steel (safety guarded) saw tooth cutting bar cutting bar. Heavy duty 18 gauge stainless steel door (304, # 4 brushed finish). Secured with two tumbler keyed locks. All doors are hinged with full length stainless steel piano hinges. Recessed body is corrosion resistant galvanized steel (20 ga.).

Counter balanced stainless steel door (20 ga.) provides maximum fire protection, mounted with full length piano hinge. Removable leak proof roto mounded liner with 9.5 litre capacity (2.1 imp. gal., 2.5 US gallons).

Installation: **Code 415A:** Provide 30-1/4" (80.6) high x 12-3/8" (31.5) wide x 6" (15.2) deep wall opening. **Code 415B:** Provide 30-1/4" (80.6) high x 12-3/8" (31.5) wide x 3" (7.6) deep wall opening. Collar is secured between recessed body flange and wall. Drill mounting holes as required. For unrestricted access, height of top of unit to floor must not exceed 57" (144.7).

Description and specifications applicable on date issued. Frost reserves the right to make improvements or changes without notice.